

CONSTRUCTION:


- ◆ BODY AND DOOR 2 1/2" THICK.
- ◆ PREPARED FOR ANCHOR.
- ◆ PREPARED FOR ALARM.

MECHANISM:



- ◆ MECHANISM WITH 1" Ø MASSIVE STAINLESS STEEL BOLTS AND 2 AUTOMATIC RELOCKING SYSTEMS.
- ◆ LOCK PROTECTED BY A 3/8" TH. HARD PLATE & LARGE ARMOR GLASS.
- ◆ S&G GR2M 3 WHEEL COMBO LOCK.

FINISH:

- ◆ CHARCOAL GRAY COLOR.

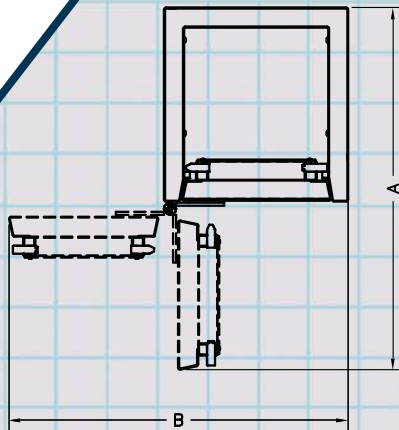


| MODELS | DIMENSIONS | |
|----------------|------------|---------|
| | "A" | "B" |
| CS-M191417-L15 | 41 1/4" | 34 3/4" |
| CS-M221817-L15 | 45 1/4" | 42 3/4" |
| CS-M261817-L15 | 45 1/4" | 42 3/4" |
| CS-M382220-L15 | 52 3/4" | 50 1/2" |
| CS-M502220-L15 | 52 3/4" | 50 1/2" |
| CS-M622220-L15 | 52 3/4" | 50 1/2" |

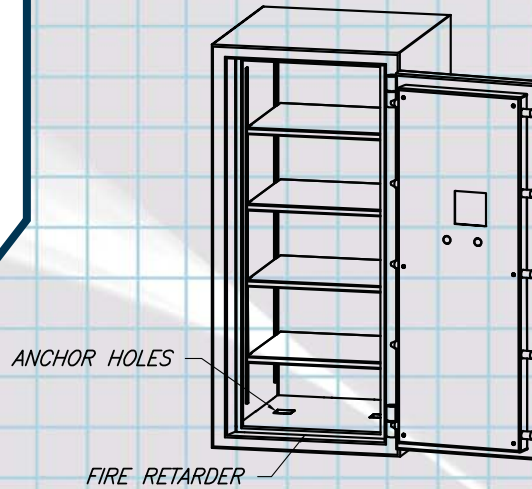

SECURIFORT

TL-15 UL SAFE
COMPOSITE
VALUE LEADER

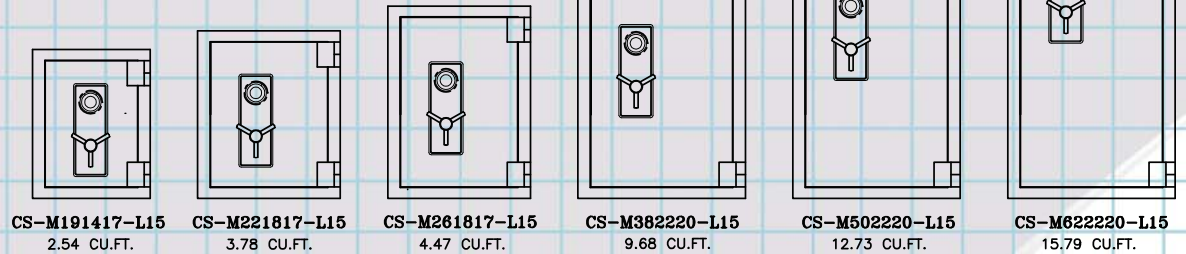

| MODELS | INSIDE DIMENSIONS | | | OUTSIDE DIMENSIONS | | | CLEAR OPEN. | | OVERALL DEPTH | WEIGHT | SHELVES QTY |
|----------------|-------------------|-------|---------|--------------------|-------|---------|-------------|---------|---------------|----------|-------------|
| | HEIGHT | WIDTH | DEPTH | HEIGHT | WIDTH | DEPTH | HEIGHT | WIDTH | | | |
| CS-M191417-L15 | 19" | 14" | 16 1/2" | 24" | 19" | 24 1/4" | 19" | 12 1/2" | 26" | 695 lbs | 1 |
| CS-M221817-L15 | 22" | 18" | 16 1/2" | 27" | 23" | 24 1/4" | 22" | 16 1/2" | 26" | 870 lbs | 2 |
| CS-M261817-L15 | 26" | 18" | 16 1/2" | 31" | 23" | 24 1/4" | 26" | 16 1/2" | 26" | 970 lbs | 2 |
| CS-M382220-L15 | 38" | 22" | 20" | 43" | 27" | 27 3/4" | 38" | 20 1/2" | 29 1/2" | 1540 lbs | 3 |
| CS-M502220-L15 | 50" | 22" | 20" | 55" | 27" | 27 3/4" | 50" | 20 1/2" | 29 1/2" | 1890 lbs | 4 |
| CS-M622220-L15 | 62" | 22" | 20" | 67" | 27" | 27 3/4" | 62" | 20 1/2" | 29 1/2" | 2240 lbs | 5 |

CS-L15-SP

www.securifort.com